

SWC300 MOTORCYCLE WHEEL CHOCK AND STAND

OWNER'S MANUAL



FOR YOUR SAFETY
PLEASE READ THESE INSTRUCTIONS CAREFULLY
AND RETAIN THEM FOR FUTURE USE.



SPECIFICATION

MODEL No	SWC300
Suitable wheel sizes (Diameter)	14"-21" (356-533mm)
Suitable wheel width	3"- 7-3/32" (76-180mm)
Wheel cradle	Adjustable to 4 positions

WARNINGS



Read and understand instructions before use.



Always wear eye/face and hand protection.




Use the correct product for your application. Make sure your motorcycle's wheel fits in the Motorcycle Stand. Do not modify this product or use it for a purpose for which it is not intended.




As with all machinery, there are certain hazards involved with its operation and use. Exercising caution will reduce the risk of personal injury.

WARNINGS

1. Do not exceed maximum load for this product (1,800 pounds). Loading a heavier motorcycle on the Stand can result in dangerous conditions to both the operator and the item loaded.
2. Always mount the Motorcycle Stand securely on level, dry surfaces that are capable of bearing the combined weight of the Stand and motorcycle.
3. Do not ride a motorcycle onto the Stand.
4. Never sit on the motorcycle while it is loaded on the stand. Never lie down under a motorcycle parked on the stand.
5. Do not use for aircraft purposes.
6. The warnings, precautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.
7. Have product serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.
8. Maintain labels and nameplates on the product. These carry important safety information. If unreadable or missing, contact SGS for a replacement.
9. Because when using the motorcycle stand, the tires are still loaded by the weight of the motorcycle, the motorcycle stand is not for storing motorcycles in winter.

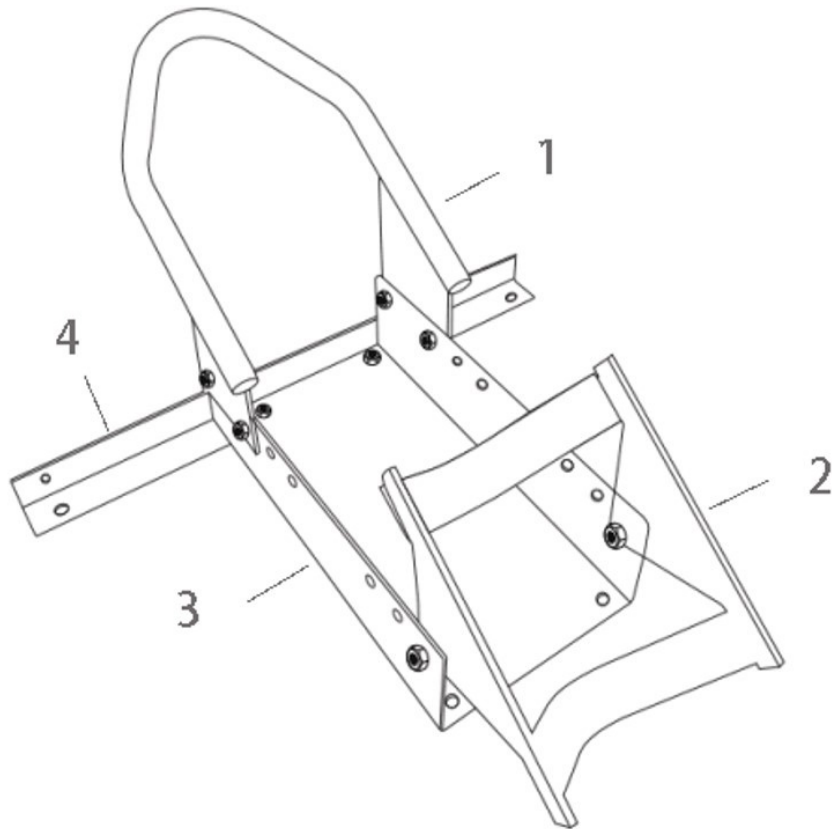


No	Part	Qty	Part No
1	Wheel Chock	1	907385
2	Wheel Cradle	1	907386
3	Stand Base	1	907387
4	Front Base Support	1	907388

 **Note: For an easier process, locate all connective elements along with the components prior to starting assembly.**

Step 1: Assemble the front base support to the front, closed end of the Stand Base, using the supplied nuts, bolts and washers.

Step 2: Install the wheel chock at the closed end of the stand base using the supplied nuts, bolts and washers. Take into account the motorcycle's wheel size when choosing the chock's installation position.

 **Note: The wheel cradle can be moved forward or backward depending on the motorcycles's front wheel size.**


Step 3: Measure the motorcycle's front wheel and see how it fits between the Wheel Chock and the Wheel Cradle. Then install the Wheel Cradle in the desired position and secure it in place using the supplied nuts, bolts and washer.

Step 4: The Wheel Chock and Stand must be mounted securely before use. Plan the location carefully. The mounting surface must be level and solid, designed to support the heavy weight of a motorcycle.

Step 5: There are mounting holes in the bottom of the Stand Base and in the Front Base Support. Use these holes as a template to plan where to mount the Stand. Mounting hardware should be inserted into all 4 of the mounting holes on each side of the Stand Base.

Step 6a - For mounting in concrete use a concrete drill bit to drill holes; then attach concrete anchor bolts (not included) to the floor before securing the Stand Base to the concrete. Follow hardware manufacturer's instructions for properly securing concrete anchors in the cement.

Step 6a - For mounting to a truck bed plan the location only after making sure that no electrical wires, gas tanks or other obstacles are in the path of the drilling. Use a steel cutting drill bit to drill the needed holes. Secure the Stand Base to the

 **Note: If you are not accustomed to doing the tasks mentioned above, the work should be carried out by a qualified service technician.**

1. As stated, the Wheel Cradle can be adjusted to one of the several positions depending on the size of the motorcycle wheel. Find the position that best locks the wheel in place when the wheel is rolled in and the Wheel Cradle pivots up to its closed position.



Note: Loading a motorcycle into a truck bed will require appropriate ramps (not included). The motorcycle must also be secured to the truck bed with straps or belts (not included) after fixing onto the stand.

2. To load the motorcycle into the stand, tilt the Wheel Cradle with the opening facing outward. Roll the wheel onto the Wheel Cradle until it tilts the opposite way and the front end of the wheel fits into the Wheel Chock.

3. If the motorcycle is going to be stored in the Wheel Stand for a length of time, it is recommended that additional stability supports are used (straps or belts).

4. To release the motorcycle from the stand, first remove any stability supports used, and then with assistance, slowly roll back the motorcycle away from the stand until the wheel is released from the wheel cradle.

MAINTENANCE

1. Frequently check the condition of the Motorcycle Wheel Chock and Stand.
2. Ensure all components are in good condition. If the Wheel Chock becomes damaged through accident, or if any weld damage is noted, the product should be replaced.
3. Check to make sure that all hardware is tightly secured in place.
4. Keep the wheel chock clean.

FOR YOUR SAFETY
PLEASE READ THESE INSTRUCTIONS CAREFULLY
AND RETAIN THEM FOR FUTURE USE.



SGS Engineering (UK) Ltd
West Side Park
Raynesway
Derby, DE21 7AZ

EC Declaration of Conformity

This is an important document and should be retained

MANUFACTURER'S NAME: SGS Engineering (UK) Ltd

TYPE OF EQUIPMENT: Motorcycle Wheel Chock and Stand

PART NUMBER: SWC300

APPLICATION OF EC COUNCIL DIRECTIVES / STANDARD:

2006/42/EC Machinery Directive

EN 12100:2010

I, the undersigned, hereby declare that the equipment specified above conforms to the above European Communities Directive(s) and Standard(s).

PLACE: Derby, UK

DATE: 13th Jan. 2021

A handwritten signature in black ink, appearing to read 'Robert Wyatt', written over a horizontal line.

(Signature)
Robert Wyatt
Company Secretary

FOR YOUR SAFETY
PLEASE READ THESE INSTRUCTIONS CAREFULLY
AND RETAIN THEM FOR FUTURE USE.

