




22" Side Cabinet

IMPORTANT! PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE ALL SAFETY INSTRUCTIONS AND WARNINGS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY CAUSE DAMAGE TO PROPERTY AND/OR PERSONAL INJURY

PLEASE KEEP THESE INSTRUCTIONS SAFE AND AVAILABLE FOR FUTURE REFERENCE.


EXPLODED VIEW

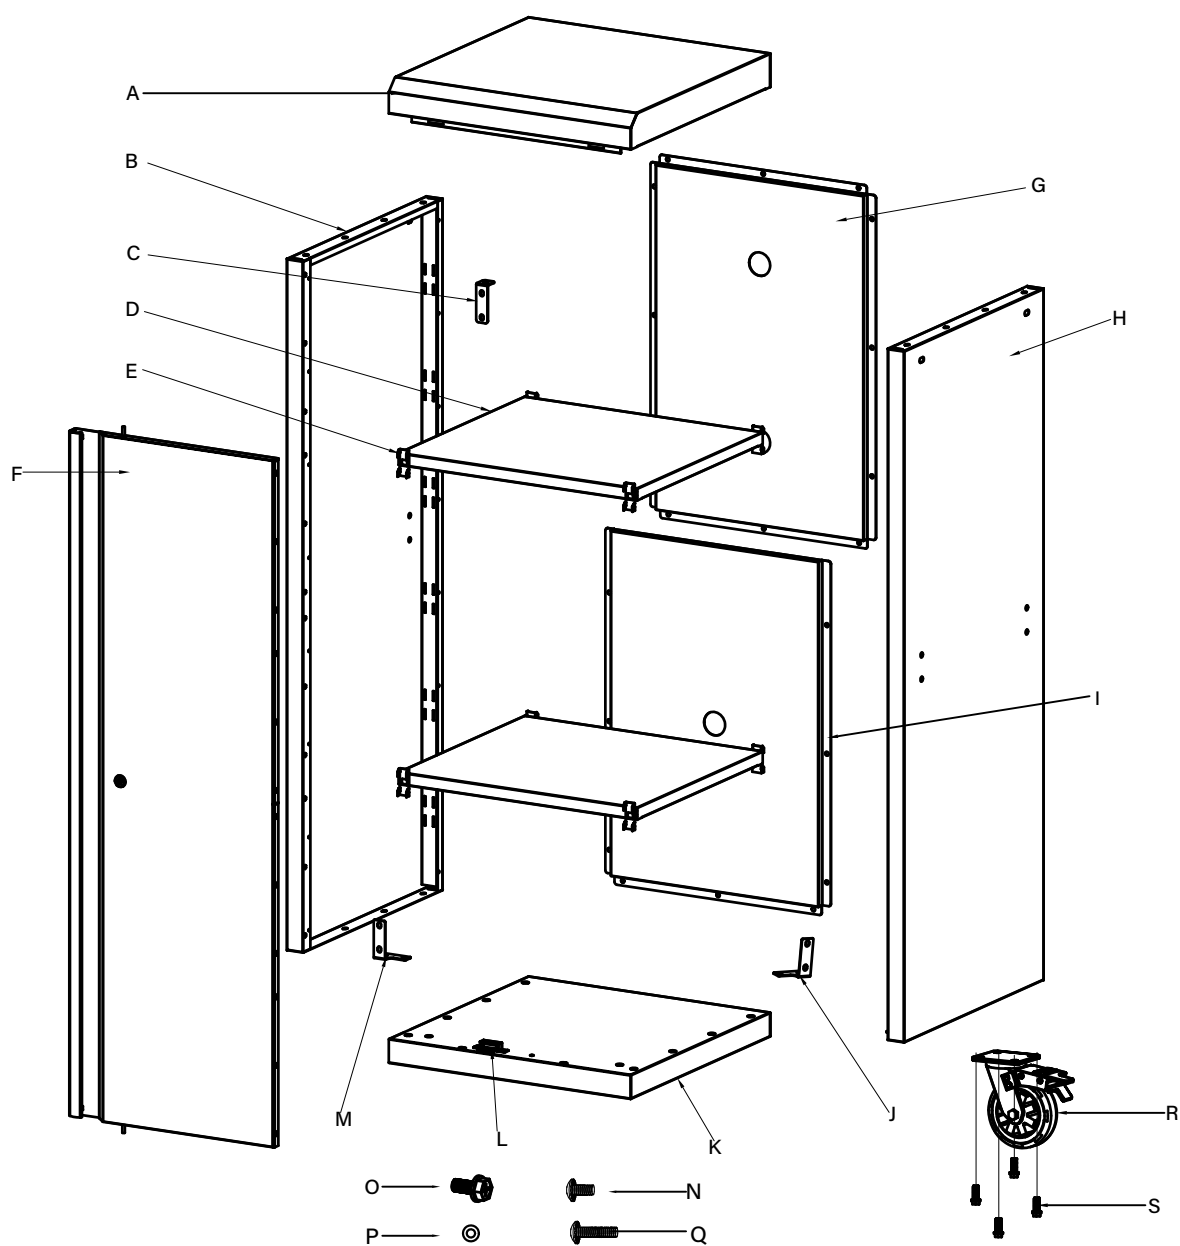


Part	Description	Quantity
A	Top Panel	1
B	Left Side Panel	1
C	L-Lock Strip	2
D	Shelf Board	2
E	Shelf Mounting Bracket	8
F	Door Panel	1
G	Top Rear Panel	1
H	Right Side Panel	1
I	Lower Rear Panel	1
J	Right Connecting Plate	1

Part	Description	Quantity
K	Base Plate	1
L	Door Stop Assembly	1
M	Left Connecting Plate	1
N	5/32" Screw	14
O	1/4"*14 Screw	47
P	Flat washer	6
Q	1/4"*35 Screw	2
R	Swivel Caster with Brake	2
S	3/8"*25 Screw	4


1. Use seven 1/4" screws to connect the left side panel to the base plate.

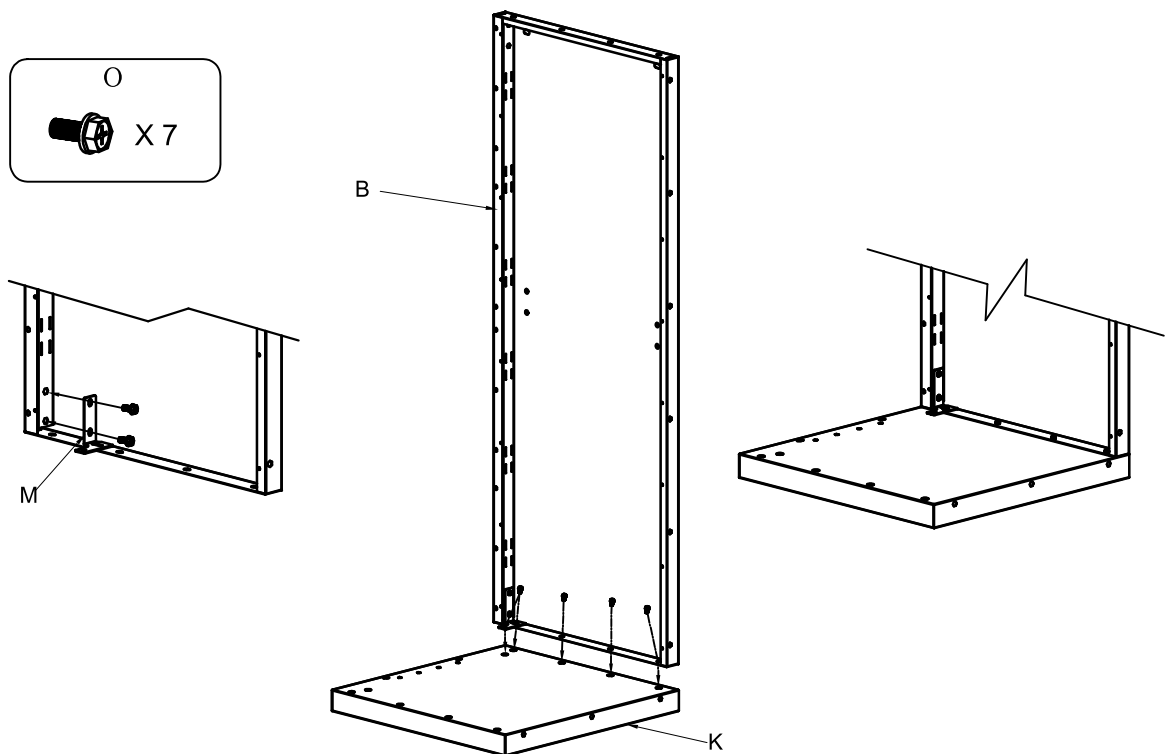


2. Use seven 1/4" screws to connect the right side panel to the base plate.

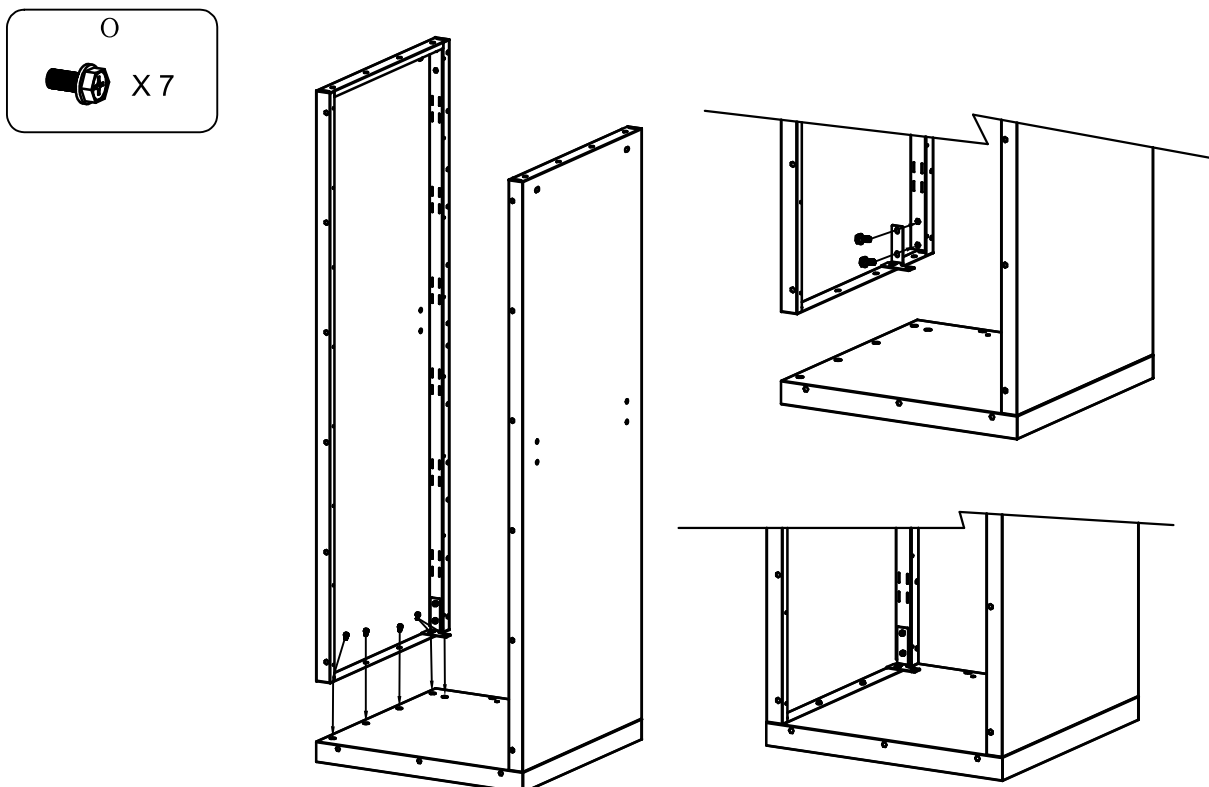




3. Use eighteen 1/4" bolts to secure the back panel to the back of the cabinet body, fastening them from the bottom upward.

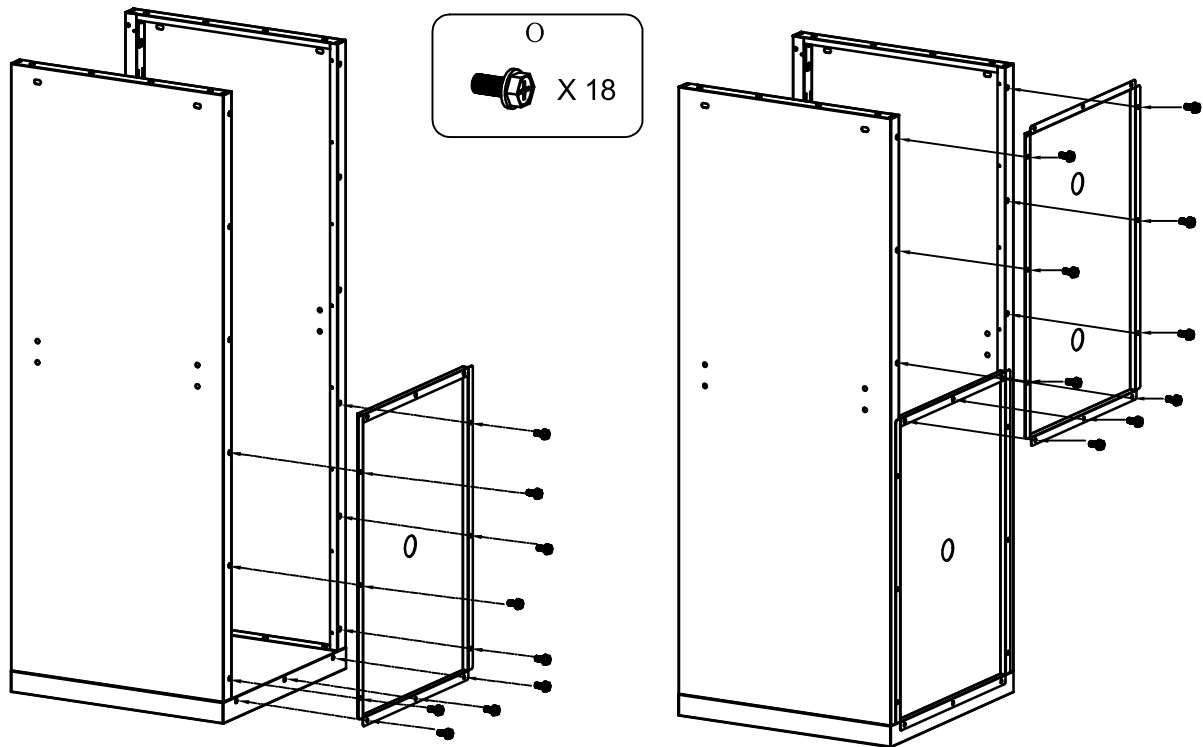

4. Mount the top plate to the cabinet body using 15 1/4" bolts.

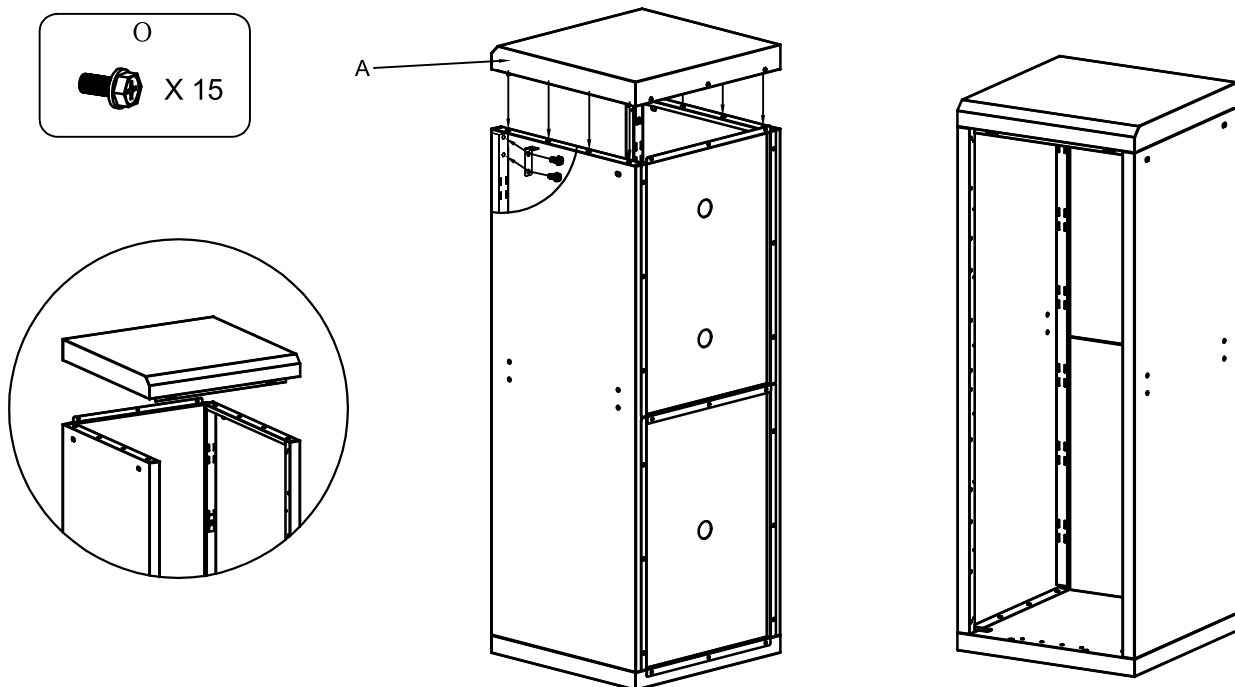


5. Attach the door stop plate to the base plate using two 5/32" screws.

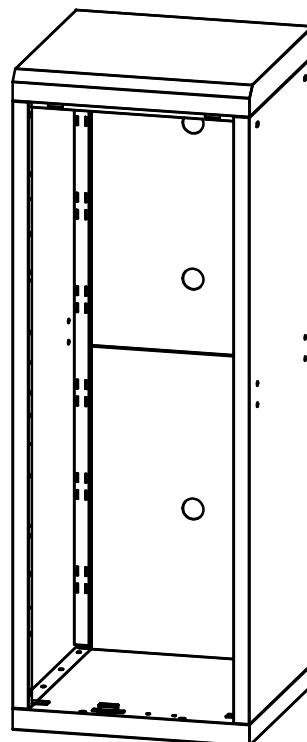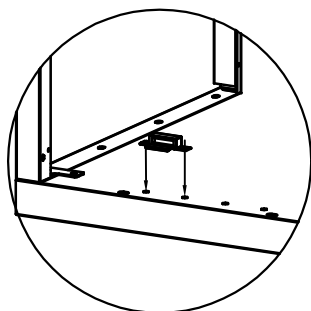



6. Shelf Installation

Position the shelf brackets at the desired height, ensuring that all brackets are at the same level. Place the shelf onto the brackets, ensuring it is properly installed.


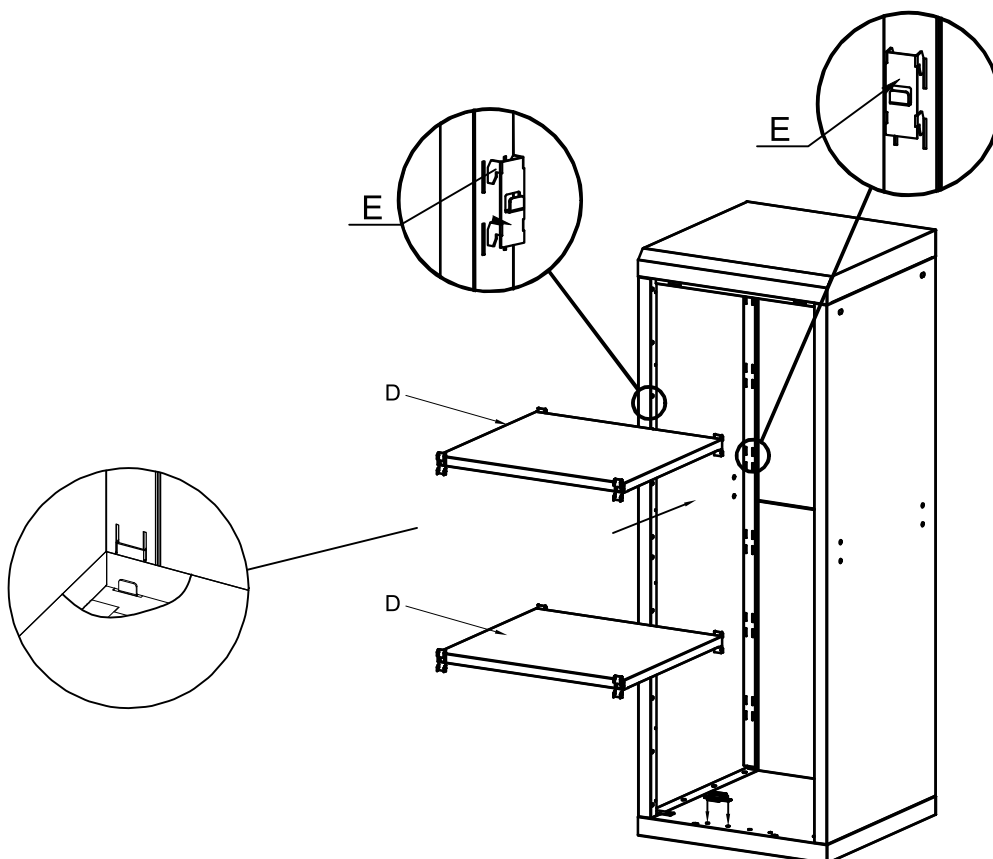


7. Door Panel Installation


Attach the door to the cabinet body using ten 5/32" screws.

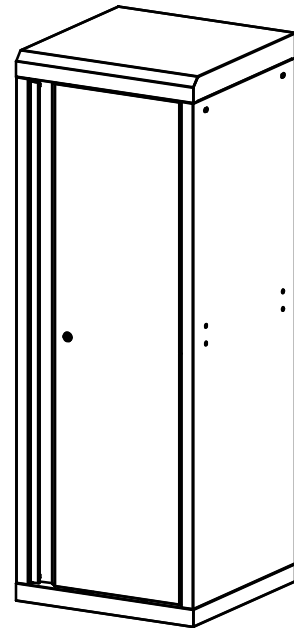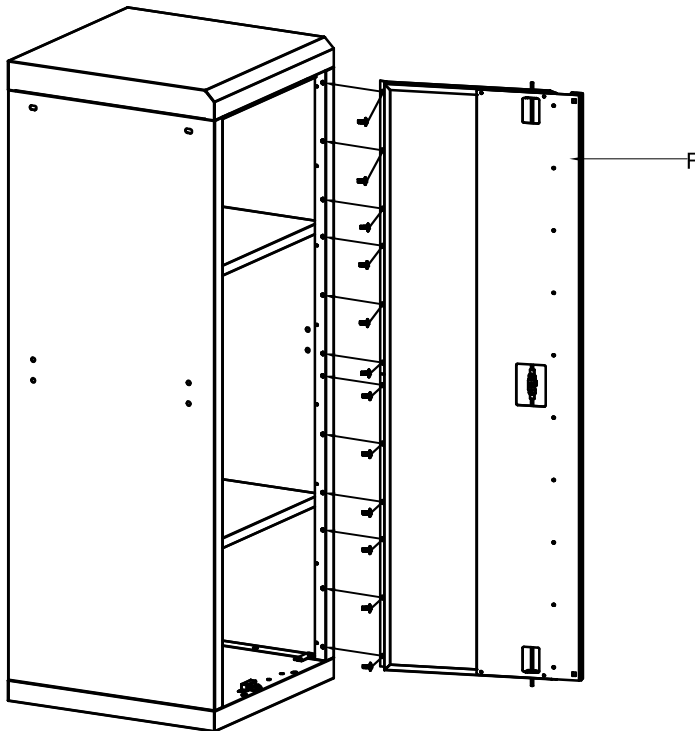

Note: The door panel can be installed on either the left or the right side.

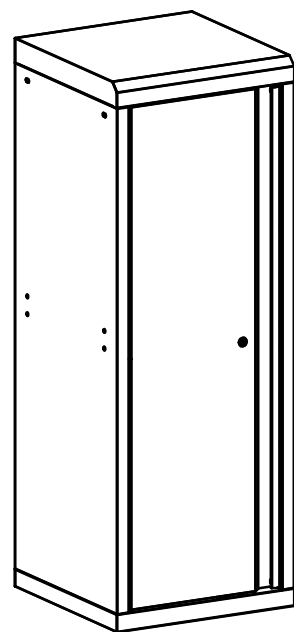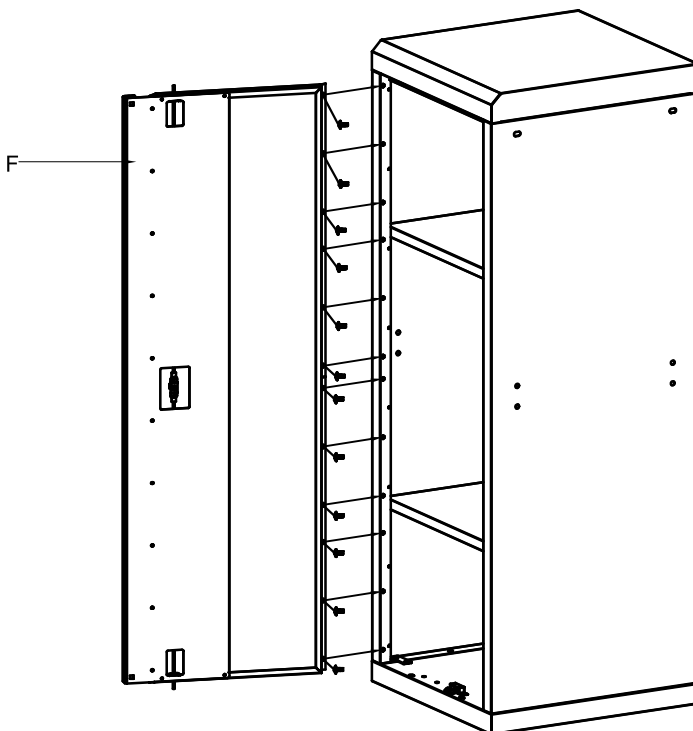

1. Lay the assembled cabinet down. Install the wheels (R) and secure them with four screws (S).

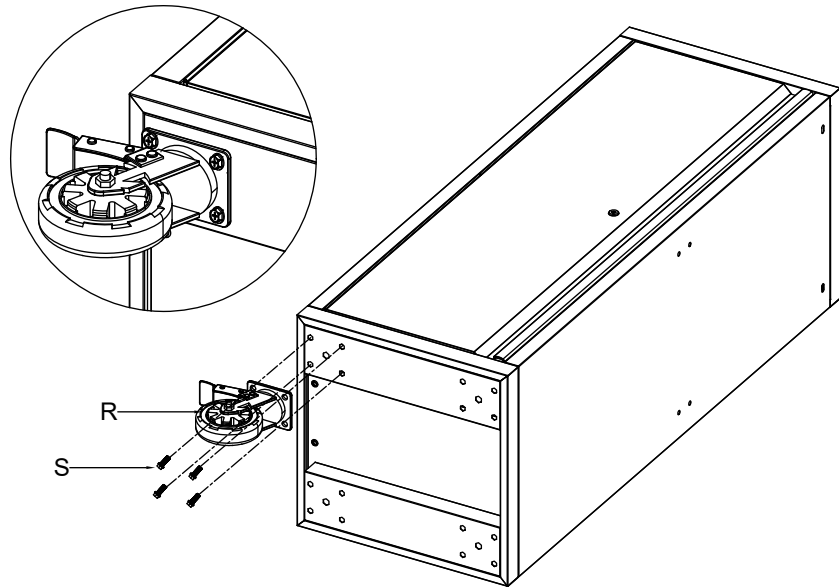

2. Connect the lower side cabinet to the main cabinet using four 1/4 X 14 (O) screws and one washer (P)
3. Connect the upper side cabinet to the main cabinet using two 1/4 X 35 screws (Q) and one washer (P)

